



HR 2500/3500 HORIZONTAL WINDLASS



IMPORTANT

MANUAL OVERRIDE PAWL

The pawl and bolt assembly herewith are to be fitted to forward side of Horizontal Windlass Housing, in the event of Manual Override being used to manually retrieve chain.

*The pawl is **NOT** designed to be laid on at anchor, use a chain stopper, devil claw or snubbed line.*

***Do not** reverse the winch with the pawl engaged as damage will result to the pawl and housing.*

Therefore, remove the pawl from the winch and store in a safe place after using the manual override.

Introduction	Page 4
Important Information	
Safety	
Installation	Page 6
Chain pipe Fitting	
Rope Chain Management System adjustment	
Depth of chain locker	
Electrical information	Page 9
Circuit breaker	
Deck switch	
Isolating switch	
Batteries	
Wiring layout	
Operating Instructions	Page 11
Manual Operation	
Anchoring	
Retrieving chain	
Rope Hauling on Capstan	
Maintenance & Troubleshooting	Page 13
Servicing	
Maintenance Instructions	
Rope/Chain splice	
Line care	
Trouble Shooting	
Maintenance Schedule	Page 15
Warranty	Page 16
Drawings & Diagrams	Onwards

INTRODUCTION

Thank you for purchasing a Muir Windlass. At Muir, we go to great lengths to develop anchoring systems that not only meet all your performance and safety requirements, but are also designed with a style and finish that enhances the aesthetics of your vessel.

With our commitment to quality and the use of superior materials and processes, we're confident you'll be pleased with your investment. When correctly installed, operated, and maintained, your new Muir Windlass will provide years of reliable performance.

SIGNAL WORDS

WARNING:

The signal word **WARNING** indicates a dangerous situation that, if not prevented, can lead to a severe injury or death.

CAUTION:

The signal word **CAUTION** indicates a dangerous situation that, if not prevented, could directly lead to or result in a damage to or destruction of the equipment.

IMPORTANT INFORMATION

CAUTION: To avoid damage to the gearbox, windlass or vessel when bringing the anchor up hard, it is a preferred practice to mark the chain at approximately 5-meter intervals from the anchor, to alert the operator to the anchor position. Alternatively, an Auto Anchor can be used.

CAUTION: Windlasses and mooring capstans must have pressure relief valves installed in the case of a hydraulic drive or an appropriate capacity circuit breaker in the case of an electric drive.

CAUTION: If anchor retrieval is impaired by high wind, heavy seas or the anchor is snagged, ease the load by either motoring or sailing slowly forward into the wind.

WARNING: Warranty will be voided if the vessel lays directly on the anchor windlass without a chain stopping device engaged.

WARNING: Under no circumstances should the windlass be operated if it is stalled or overloaded.

INTENDED USAGE

This product is exclusively intended for the application as an anchor winch and as agreed on the time of delivery. Any other or extended form of use does not comply with this definition of intended use.

The intended use includes compliance with this documentation and other applicable documents to avoid malfunctions and damage in operation.

The product in its delivery status is safe to operate. However, the product may pose dangers if improperly used by unauthorized, untrained, and uninstructed staff or if not used according to its intended use.

SAFE OPERATION

Read all safety instructions and information. Failure to comply with safety instructions and information may lead to property damage, serious injuries, or death.


- Ensure that hands, feet, hair and clothing are kept clear of the windlass and other loose gear when in operation.
- Ensure no one is swimming nearby when the anchor is being lowered or retrieved.
- Keep hands well clear of capstan, gypsy, chain and rope.
- The windlass should never be used for lifting people aloft.
- Do not use a windlass as a bollard for mooring, towing or being towed.
- When the windlass is at lay or the anchor stowed, always ensure the clutch is tightened with the clutch handle, and a Chain lock, Devils claw or Snubber Line is fitted to retain the anchor. The use of these accessories will prevent excessive loads on the gearbox and accidental release of the anchor.

The anchoring systems are very high load bearing and extremely powerful pieces of mechanical equipment. Extreme caution must be taken when operating these systems, and only trained personnel who have reviewed this manual shall be permitted to use them.

Key safety risks include, but are not limited to:

- Crush points between highly loaded chain and the equipment
- Entanglement in rotating equipment (capstan, gypsy/ chainwheel etc.)
- Impact risks from chain whip due to uncontrolled chain release through improper use of the windlass.
- Impact risks from chain whip due to misaligned equipment.

WARNING: failure to review and abide by this document for the correct installation, commissioning, operation, and maintenance of the equipment will increase the likelihood of above risks.

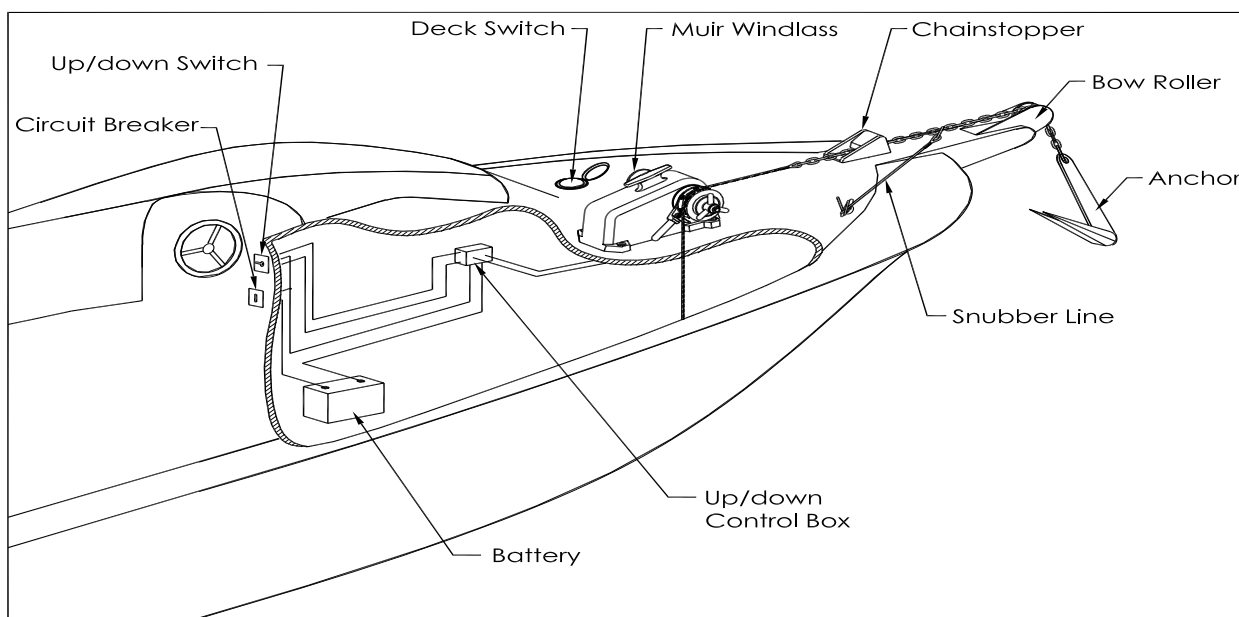

INSTALLATION

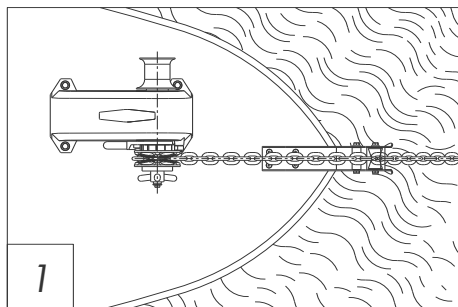


Figure (1)

Locate the windlass centrally fore and aft. Check that the chain leads unhindered to the anchor roller. The chain leads onto the top side of the starboard gypsy, wraps around 100° and falls below deck through the chain pipe (hawser). Ensure there is sufficient room around the windlass to allow full rotation of the windlass manual/clutch handle (if supplied).

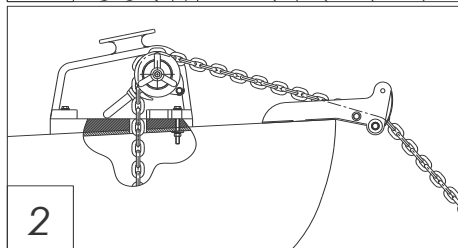


Figure (2)

The centre line of the gypsy must be in the same plane as the chain lead from the bow roller. If the deck is angled (fore & aft) or curved (port to starboard) a suitably shaped mounting block will be required to spread the load evenly over the deck surface and mount the windlass base on a level and even footing.

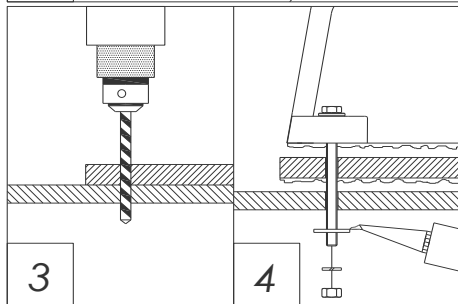


Figure (3)

Place the shaped mounting block (if required) onto the deck. Using the layout template supplied, mark the mounting centres and drill the holes 11mm (7/16") for the deck bolts of 10mm (3/8"). Mark the chain pipe centres at this time. (Refer template).

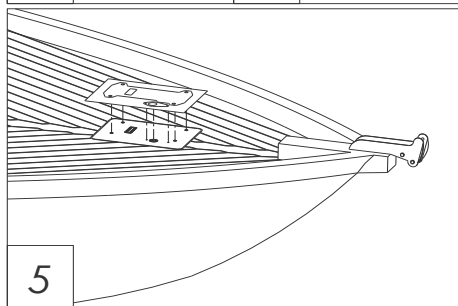


Figure (4)

Apply an appropriate sealant to the base plate and mounting block (if required) and carefully tighten the nuts & washers onto the deck bolts under the deck. Remove excess sealer.

For Aluminium or Steel hull vessels, it is important to insulate the windlass with a non-conductive gasket to avoid corrosion. This also applies below deck with the mounting bolts, nuts and washers.

Where the deck construction is light or of foam sandwich construction, a plywood stiffener of at least 16mm (5/8") should be fitted to the underside of the deck to spread the load and to prevent the bolts from pulling through the deck. Large diameter washers on the underside of the stiffener assists to spread the load.

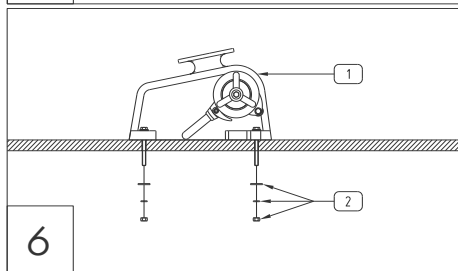


Figure (5)

1. Mount the windlass from above as shown.


Figure (6)

2. From below, place washers and nut on each stud and tighten.

For fitting of the chain pipe or RCMS see next page.


NOTE: On assembly, grease all moving parts with appropriate marine grade grease.

Horizontal Winch Chain Pipe Fitting

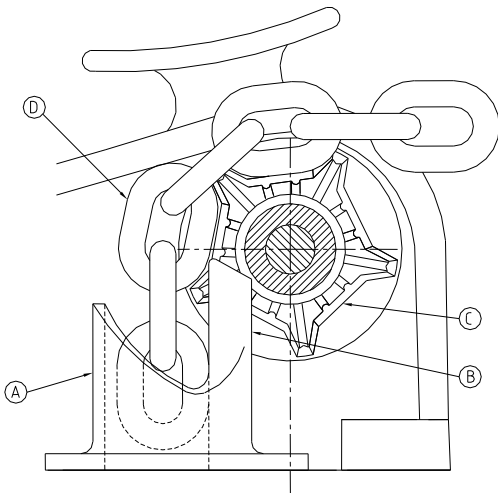

1. To position the chain pipe (A), first align the stripper (B) with the centre of the gypsy.
2. Wrap the chain (D) around the gypsy (C) and through the chain pipe to position the chain pipe correctly.
3. Align the stripper to the inside of the chain as it falls vertically into the chain locker.
4. Mark the chain pipe position and drill the bolt holes, finally cut out the section for the chain to pass through the deck and then bolt the chain pipe into place.

Horizontal Winch Chain pipe with Rope/Chain Management System Fitting

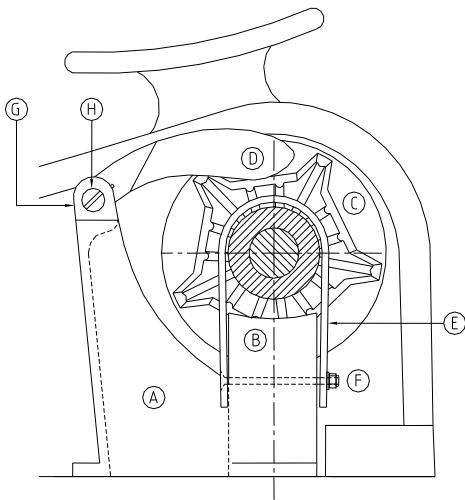

1. Position the chain pipe (A) so that the peeler (B) is directly under the centre of the gypsy (C), and the finger sits on top (D).
2. Slide the S/S stripper (E), over the middle of the gypsy lining it up with the hole in the peeler for the screw (F).
3. Fit the stripper with the screw making sure the countersunk head is inside the chain pipe. Tighten with washer and Nylock nut.
4. Check the position of the chain pipe and make sure the stripper does not hit the gypsy when it is rotating. Spot the holes for the chain pipe on the deck with the chain pipe in position. Remove the chain pipe and drill the mounting holes. Refit the chain pipe, checking its position again, and fasten it to the deck.
5. To tension the rope finger, loosen the grub screw (G), behind the finger in the chain pipe, and turn the pin (H), towards the gypsy with a large screwdriver.

Rope/Chain Management System (RCMS)

Optional chain pipe kits (with pipe, special 180-degree stripper and spring-loaded finger) are available. The rope finger pawl guides the rope and chain around the gypsy and through this special chain pipe. The standard chain pipe with its integral stripper is normally supplied when otherwise specified or ordered by the customer.


Adjustment: Firm tension of the finger is required to reduce rope (nylon line) slipping through the gypsy. Check the spring tension (at least) annually and re-tension the spring when needed. To adjust this tension (if your line is slipping) refer to the procedure below.

Procedure:

1. Loosen the grub screw on the chain pipe with an Allen key for finger adjustment.
2. Turn the screwdriver clockwise to tension the spring, while holding the tension re-tighten the grub screw.

DEPTH OF THE CHAIN LOCKER

Measuring the vertical distance (minimum fall) underside of the deck and the top of the completely stored and heaped anchor rode in the locker will assist in determining the installation to suit your vessel. Refer to the fall depth diagrams, and the options detailed below. It is also recommended that the chain be directed to the centre of the chain locker.

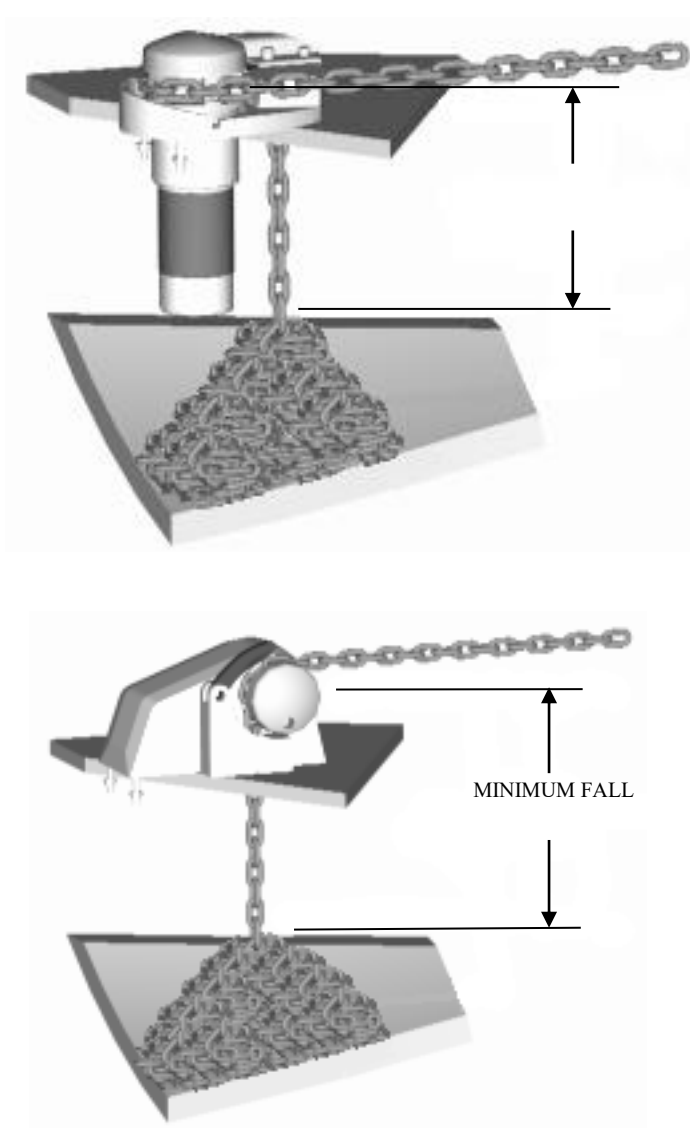

Vertical Windlass

The running gear, gypsy and capstan are positioned above the deck with the motor and gearbox below. Vertical windlasses operate at best with greater anchor rode fall than the horizontal windlass and a minimum fall of 300mm from top of stacked anchor rode is recommended. This is particularly important if using nylon line, which does not fold and stack as well as chain. Vertical windlasses minimise deck intrusion and the modern curved lines of the Muir windlass enhance the look of any vessel. A vertical windlass provides the advantage of a 180-degree wrap of the anchor rode around the gypsy.

Horizontal Windlass

Fully enclosed, above deck, this style is usually preferred where locker space is limited, or extra fall is required. The motor and gearbox are fully enclosed in the housing with nothing protruding below the deck. The horizontal windlass operates with optimum anchor rode fall of at least 300mm from the top of the stacked anchor rode, and due to the horizontal orientation of the gypsy higher above the deck there is additional fall provided. These units are ideally suited for vessels with less locker space.

Vertical Windlass Model	Horizontal Windlass Model	Minimum Fall (Dist. Top of Pile)
VR/C 600	HR 600/700/806/808	300 mm
VR/C 850/1250/2200	HR 1200/1600	450 mm
VR/C 2500/3500	HR 2500/3500	650 mm
VR/C 4000	HR 4000/4200	800 mm

HANDY HINTS

A common installation error is placing the windlass too far forward or too close to a bulkhead, leaving inadequate space for proper chain and anchor stowage. For optimal operation, the **chain fall** should land as close as possible to the **centre of the chain locker**, allowing maximum vertical drop. If the chain falls against a bulkhead or onto the stem, it will often **pyramid and jam**.

If the windlass must be positioned so the chain does not fall centrally, a **metal guide tube** can be installed beneath the hawser to redirect the chain. This tube should:

- Be at least **twice the diameter of the chain**
- Be installed **as vertically as possible**

Position the windlass to provide the best chain fall, with the **hawser facing forward**, and ensure there is enough space to run the **electrical cabling**.

WARNING: INCORRECT WIRING CAN LEAD TO FAILURE OF WINDLASS AND SEVERE INJURY OR DEATH DUE TO POTENTIAL FIRE HAZARD.

Circuit breaker (must be fitted to ensure warranty)

If the windlass is overloaded or stalled the circuit breaker automatically cuts off power to the windlass and protects the wiring and motor. The circuit breaker should not be used as an isolating switch, purely for safety reasons.


Deck Switches are best located out to either port or starboard or directly behind the windlass in a position where it can be easily reached with your foot or knee, preferably where you can view the anchor and chain coming aboard.

Isolating Switch should be fitted in an accessible position for safety, ideally close to the battery or switches. The isolating switch is not a circuit breaker.

Batteries are best located as close to the windlass as possible. Larger cables will reduce the voltage drop to the motor and the heat generated when running the windlass. Small diameter cables drop voltage considerably. Use the following table as a guide to your required wire size:

Distance from battery to motor (m)	Cable Size		Cable Diameter (mm)
	(mm ²)	AWG	
7 (23')	25	3	8 (5/16")
9 – 17 (30' – 55')	50	1	10 (3/8")

Rotation: Windlasses may be wired for single or dual direction, using single or dual deck switches for raising or lowering. Alternatively, a remote-control solenoid packages with Toggle Switch, Hand Pendant or Auto Anchors are available.

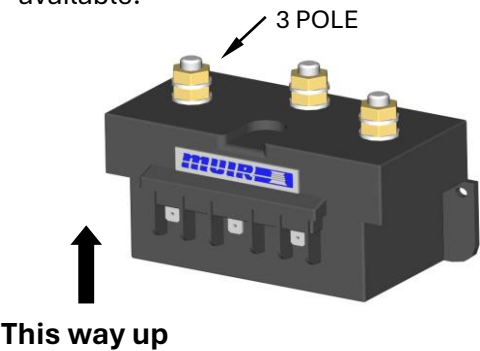

Solenoid Installation

We recommend that the solenoid is installed in an upright position, where it has **no exposure** to sea water but is near the electric motor of the windlass.

For wiring information, please refer to the appropriate wiring diagram.


WINCH MODEL	MOTOR TYPE	DIAGRAM #
HR1200	2 POLE	P261020
HR1600	3 POLE	P261021
HR2500	3 POLE	P261021
HR3500	3 POLE	P261021
HR4000	3 POLE	P261021
HR4200	4 POLE	P261022

WIRING LAYOUT


CAUTION: NOT BE USED AS WIRING DIAGRAMS

TOGGLE SWITCH LAYOUT

1. BATTERY
2. CIRCUIT BREAKER
3. SOLENOID/CONTROL BOX
4. TOGGLE SWITCH

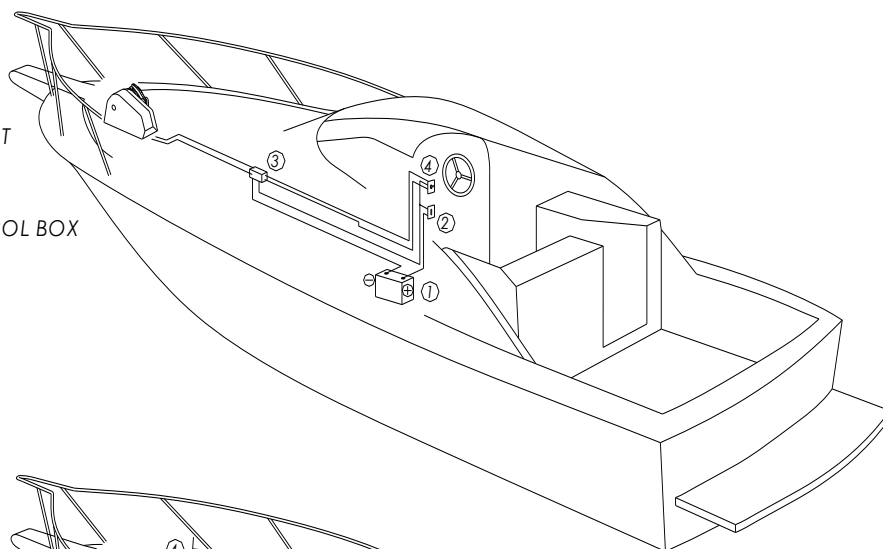


1. BATTERY
2. CIRCUIT BREAKER
3. SOLENOID/CONTROL BOX
4. DECK SWITCHES
5. TOGGLE SWITCH

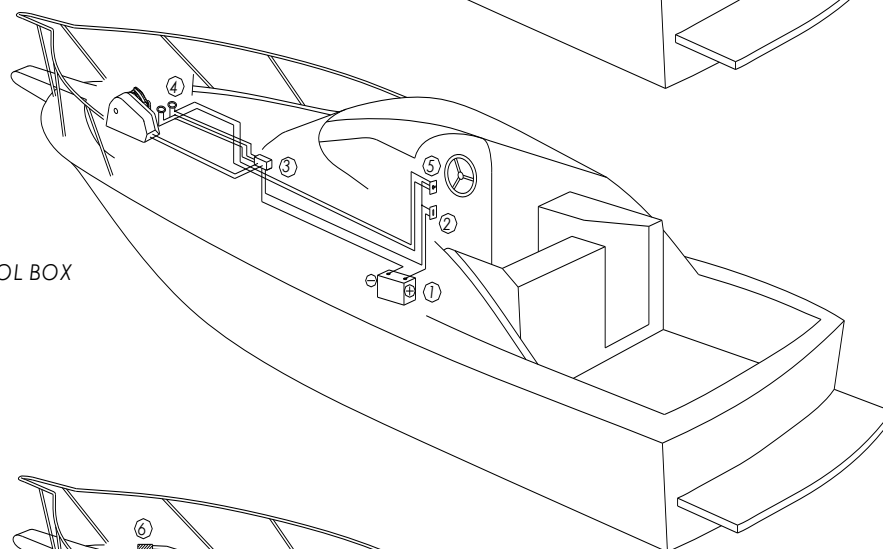

AUTO ANCHOR LAYOUT

1. BATTERY
2. CIRCUIT BREAKER
3. SOLENOID/CONTROL BOX
4. DECK SWITCHES
5. AUTO ANCHOR
6. AUTO ANCHOR SENSOR

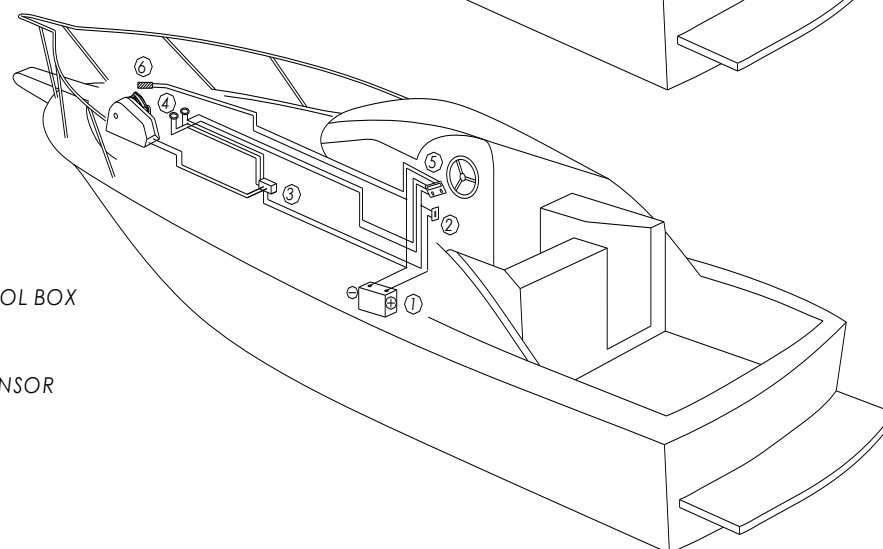

OPERATING INSTRUCTIONS

WARNING: Always keep well clear of the windlass when releasing or retrieving the chain and anchor. Keep fingers, hair, loose clothing, and other items well away from the windlass during operation—especially around the gypsy where the chain enters and exits.

These areas pose a high risk of crush and entanglement injuries. Always exercise extreme caution.

Manually Releasing chain: To release the anchor rode, place the handle onto the clutch nut as shown on the diagram and turn **anticlockwise** to release the clutch brake. Let the anchor fall and control the run of the chain by tightening handle **clockwise** using the clutch mechanism as a brake.

Anchoring: When lying at anchor, always use a chain stopper, nylon/chain bridle, or snubber line to absorb shock loads and prevent strain on the windlass main shaft.

CAUTION: Never use the windlass as a mooring bollard. Doing so may cause serious damage to the windlass and related deck fittings.

Retrieving Chain: Before operating the windlass tighten the clutch with the handle in a **clockwise** direction, then remove the handle. If the anchor is buried hard, motor forward to pull it free after hardening up on the windlass, to ease the load on the windlass.

Rope Hauling on the Capstan: The capstan can be operated independently of the gypsy. Secure the anchor rode (via Chain lock, Gypsy lock or Snubber) then release the clutch. The windlass capstan can now be operated separately.

Electric operation: To release the anchor, press the remote switch to the “**Down**” position.

This will immediately reverse the motor and allow the chain and anchor to drop.

Once the anchor reaches the desired depth, simply release the switch to stop the windlass. If you wish to lower the chain and rope further without using power, this can be done by manually releasing the clutch.

In the event of a rope jam:

- Loosen the windlass clutch to release the jammed rope.
- Never continue operating the windlass if the anchor or chain is jammed. Line slippage in the gypsy can damage the rope.

Auto Anchor Launching: Two-direction windlasses are now standard. When the anchor and bow roller are positioned correctly, the anchor can begin to drop immediately when the windlass is reversed. This setup allows the entire anchoring operation to be controlled remotely from the aft deck or flybridge.


Remote switches are self-centring, meaning the windlass will stop automatically when the switch is released.

To help judge when the anchor is nearly retrieved, mark the chain at 2- and 5-metre intervals (6.5 ft and 16.5 ft). This gives the operator a visual reference during retrieval.

When retrieving the anchor, take extra care during the final two metres. Rather than letting the anchor fly up and slam into the bow roller—which puts unnecessary strain on the roller, windlass, and foredeck—ease off the switch gently to allow a controlled recovery.

CAUTION: Go slowly during the last few metres of retrieval by releasing the switch early, rather than allowing the anchor to fly up over the bow roller and pull tight. Sudden impact can place excessive load on the bow roller, windlass, and foredeck, and should be avoided.

Clutch Nut Operation & Manual Release

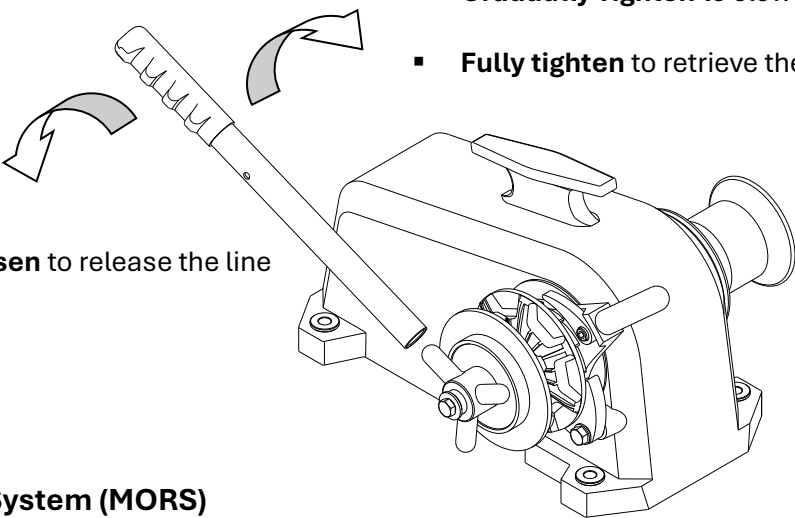- **Gradually loosen** to release the line
 - **Gradually Tighten** to slow down the outgoing line
 - **Fully tighten** to retrieve the anchor under power
- 

Manual Override System (MORS)


The MORS system allows you to manually recover the anchor and chain without using electrical power.

To operate manually:

1. Engage the locking pawl into the gypsy. This prevents the gypsy from rotating backwards.
2. Slightly release the clutch by turning it anticlockwise. This frees the gypsy to rotate.
3. Insert and rotate the manual override handle clockwise to engage the mechanism.
4. Pull the handle anticlockwise to drive the gypsy and recover the chain. The locking pawl will engage during this motion, allowing the chain to be retrieved.
5. When the handle is moved clockwise again, the load will be taken up by the locking pawl, allowing for the next pull.

Repeat steps 4 and 5 in a back-and-forth motion to continue manual retrieval.

Rope/Chain Splice.

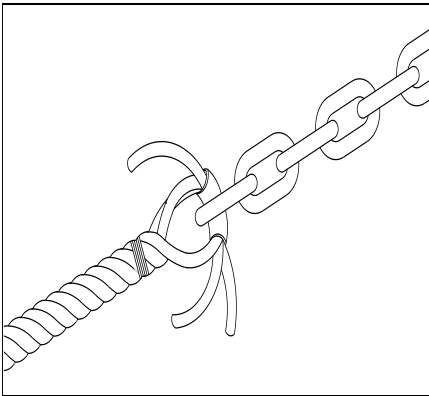

1. To stop rope unravelling, seize rope 400mm (16") from end with whipping twine. Unlay strands.
2. After placing 20mm (3/4") of heat shrink sleeve tubing through the last link of chain, pass one strand of rope through sleeve and chain from one side and the other two strands of rope from the opposite side. (See illustration).
3. While pulling all three strands tight, shrink the sleeve tightly onto the rope using a hairdryer / fan heater or by immersing in boiling water.
4. Remove seizing and complete back splice in normal manner for two full tucks. With a hot knife pare down the three strands by 1/3 and insert two further tucks. Pare down by another 1/3 and finish with two tucks. Cut any remaining tails.

Line Care


Using the wrong type of rope may lead to jamming and excessive wear. Muir Windlasses are specifically designed to operate with 3-strand nylon rope (as supplied by Muir), which has been specially treated with fabric softener to prevent hardening over time.

To maintain flexibility and performance, it is recommended that you soak your rope in fresh water with fabric softener every three months.

MAINTENANCE INSTRUCTIONS

You will require the following tools to complete this procedure:

- (i) Clutch/Manual recovery handle.
- (ii) 14mm (9/16") Socket & 3" extension bar with ratchet.
- (iii) A Lithium/Teflon based marine grease.
- (iv) HR1200 Exploded view drawing: K08-COMHR1200

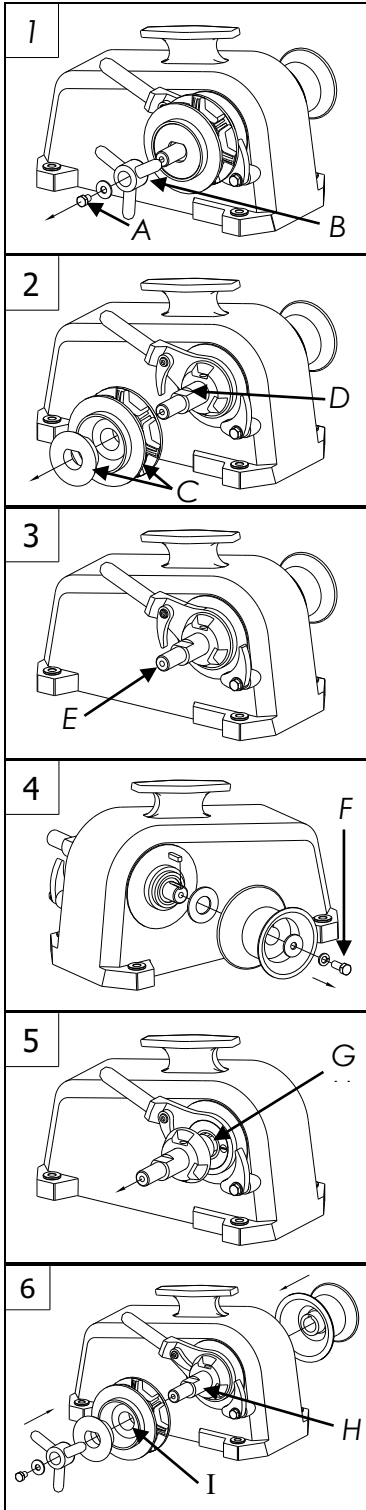

1. Removing Clutch Nut

& Hex head Screw. Place 14mm (9/16") Socket onto (A) Screw and turn anticlockwise to remove. Now the Clutch nut (B) can be removed by turning it anticlockwise (this may require the initial use of the Clutch/Manual recovery handle).

2. Removing Gypsy & D-Cone

The D-cone & Gypsy (C) is now free to remove from the Main Shaft (D).

3. Greasing *(if no further maintenance is required)*

After removing the gypsy & D-cone it is now possible to grease the exposed Main shaft & cone (E). Then reverse the above steps to re assemble. (Also see Note on bottom of page)

4. Removing Capstan.

Place 14mm (9/16") Socket onto (F) Screw and turn anticlockwise to remove. Now the Capstan can be removed. Taking Care. Not to lose the capstan drive key.

5. Greasing

Slide Shaft out partly as shown, then generously grease (G) the surface/bore of bush and exposed Main Shaft

6. Re-assembly

Before re-assembly, grease the exposed Main Shaft/cone (H) & Gypsy bore (I). To complete the service or replacement of parts reverse the above steps.

SERVICING

Rinsing all deck gear with **fresh water after each excursion** helps minimise salt build-up and corrosion.

For recreational vessels, we recommend that windlasses be **stripped down annually**, with all moving parts **cleaned and re-greased** using a suitable **marine-grade (non-soap-based) grease**. Regularly clean the clutch cones and re-apply a thin film of marine anti-seize to the cone surfaces. This ensures smooth running of the gypsy and chain when the manual freefall is operated.

Windlasses on **workboats and charter vessels** should be serviced more frequently, in line with their higher usage.

The gearbox is **factory-filled and sealed** with a long-life synthetic oil, which does **not require replacement** for the lifetime of the gearbox under normal operating conditions.

TROUBLESHOOTING

ELECTRICAL CHECKS

1. Ensure the battery circuit breaker is on and the isolating switch is engaged.
2. Confirm the battery is charged to the correct voltage – 12 V or 24 V, depending on the vessel.
3. Check that the foot switch plunger is making proper contact.
4. Check that the remote-control solenoid is activating.
 - If you hear a clicking sound, the issue may be low voltage, a faulty solenoid, or a loose or disconnected wire.
5. Inspect all wiring between the controls, solenoid, and motor for continuity or damage.
6. If the motor still does not turn after the above checks, inspect the motor brushes to ensure they are not worn or sticking.

MECHANICAL CHECKS

If the windlass running gear will not turn or operate, check the following:

1. Confirm the clutch beside the chain gypsy is properly tightened using the supplied handle (see operating instructions).
2. If the line is slipping, check the tension on the RCMS finger and increase spring tension as needed (see RCMS adjustment section).

HYDRAULIC MOTOR

For any issues related to the hydraulic motor, contact your nearest Muir service agent or Muir Engineering.

MAINTENANCE SCHEDULE

TIMEFRAME	DATE	PROCEDURE
At Installation		See installation instructions
6 months after installation		• Check all bolts are tight. • Check Grease tape/anti-corrosion film on Motor /gearbox
12 months after installation		• Remove chain wheel • Clean cones • Fully grease and lubrication.
2 years after installation		• Remove chain wheel • Clean cones • Fully grease and lubrication.
3 years after installation		• Remove chain wheel • Clean cones • Fully grease and lubrication.
4 years after installation		• Full winch Service

FIND MORE TECHNICAL INFORMATION AND GYPSY SELECTOR ONLINE

muir.com.au/support/



WARRANTY

Limited for period of One year (First Owner)

We warrant each new product manufactured by us to be free from defects in material and workmanship for a period of 3 years (first Owner).

This warranty shall become effective only upon receipt of a completed warranty registration, which shall identify the product so registered by serial number. This warranty shall remain in effect for a period of three (3) years from the date of purchase.

For vessels in charter or hire the warranty is one (1) year due to various operators and overloading which may occur.

Conditions

While this warranty applies to defects in material and workmanship, it does not apply to:

- Normal worn parts or damage caused by neglect, lack of maintenance, accident or improper service/installation or service by persons other than an authorised Muir representative.
- Muir shall not be responsible for failures due to products being used in applications that are not intended for or exceed the products performance specifications.
- For warranty claim, defective product must be returned to Muir for inspection.
- Muir will not be responsible for freight charges, removal or installation labour on warranty claims.
- Damage due to unsatisfactory storage or use of equipment prior to installation in the approved/intended manner.

Exclusions

Warranty is limited to twelve months for:

- Electric motors / controls / equipment
- Hydraulic pumps / controls / valves
- Weather seals
- Use on charter/hire/commercial boats

All incidental and/or consequential damages are excluded from this warranty. Warranties of merchantability and fitness are excluded from this warranty. Implied warranties are limited to the life of this warranty. Some countries do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above may not apply to you.

We reserve the right to improve the design or materials used on any product without assuming any obligation to modify any product previously manufactured or used.

Liability

Muir Engineering liability under this warranty shall be to the exclusion of all other warranties or liabilities (to the extent permitted by law). In particular (but without limitation):

Muir Engineering shall not be liable for:

Any indirect or consequential loss including (without limitation) any loss of anticipated profits, damage to reputation or goodwill, loss of expected future business, damages, costs or expenses payable to any third party or any other indirect losses. Any damage to yachts or equipment. Death or personal Injury (unless caused by Muir Engineering negligence).



muir.com.au/warranty/

REGISTER YOUR PRODUCT FOR WARRANTY


SOLENOID INSTALLATION

WARNING

Do not over tighten terminal nuts, may cause internal damage

Ensure bottom nut is held with a spanner when tightening top nut

Please apply this method to all reversing solenoids, circuit breakers and motor terminals.

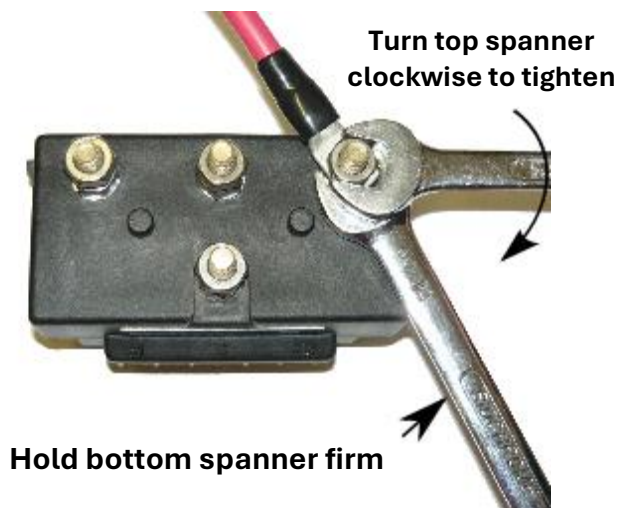

Correct method using 2 spanners



Incorrect method using 1 spanner


NORMALLY APPLIES TO THESE WINCHES AND MOTORS

MOTOR 12/24/48V	(1200W)	(1500W)	(1700W)
	1000W	1200W	1500W
WINCH MODEL	VR/C1250	VR/C2200	VR/C3500
		VR/C2500	HR3500
	HR1600	HR2500	HR4000
	DW10	DW12	DW15

WARNING


Do not over tighten terminal nuts.
It may cause internal damage.
Ensure bottom nut is held with a spanner
when tightening top nut.

Please apply this method to all
reversing solenoids, circuit breakers
and motor terminals.

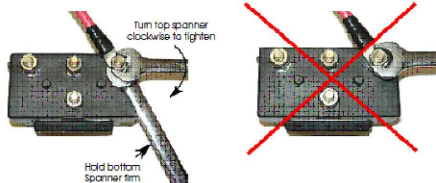

Correct method using 2 spanners. Incorrect method using 1 spanner.

REFER TO AUTO ANCHOR OPERATION
MANUAL FOR CHAIN METER WIRING

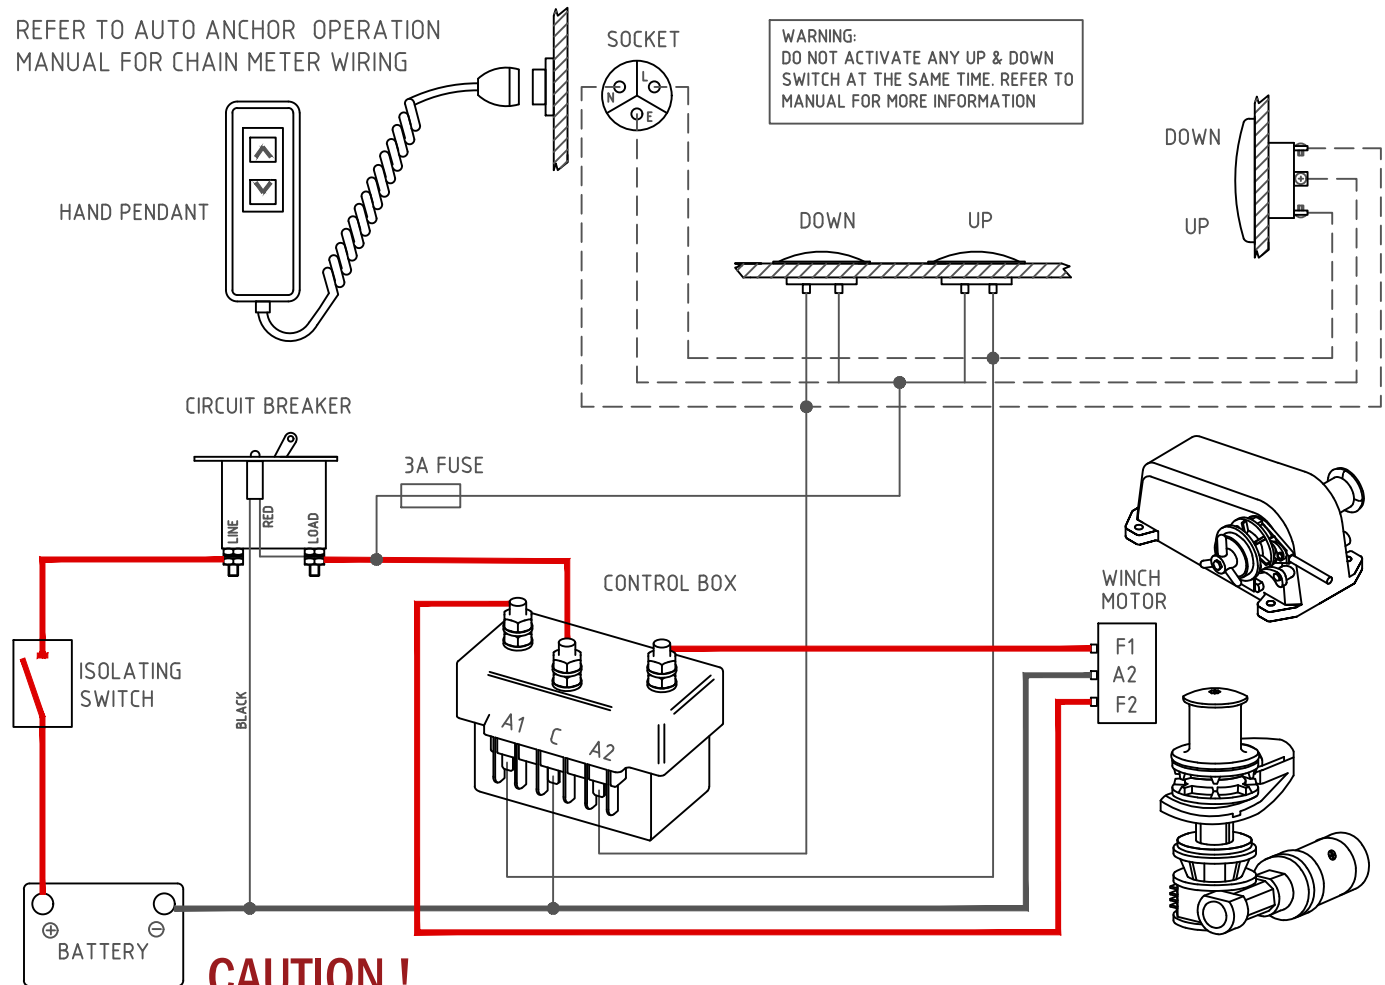

CAUTION !

TERMINAL ARRANGEMENT SHOWN IS INDICATIVE
→ REFER TO YOUR SPECIFIC SOLENOID LAYOUT DIAGRAM

Motor Pole	Connected to
F1	M2 Solenoid
F2	M1 Solenoid
A2	(-) Battery

- REFER TO MANUAL FOR WIRING INDICATED BY HEAVY LINES
- LIGHTER LINES INDICATE LIGHT WIRING.
- DASHED LINES INDICATE OPTIONAL WIRING.
- CONNECTION BETWEEN WIRE

MUIR WINDLASSES AUSTRALIA

TITLE
THREE TERMINAL MOTOR (REVERSING)
WIRING DIAGRAM (POSITIVE ACTING SOLENOID)


PART No.
P261021

DRN JK	DATE 25/11/02	DRG No. P261021
SCALE NTS	APP1 Julia D	APP2 RD
		SIZE A4

© COPYRIGHT MUIR ENGINEERING PTY. LTD.


REV No. 6
DESC.
ADDED CONNECTION TABLE

BY.
CO
DATE.
03/06/2025




MATERIAL
FINISH

NOTE: CHAIN STOPPER CAN BE FITTED ANYWHERE BETWEEN THE WINDLASS AND BOW ROLLER.
CHAIN STOPPER MUST BE PARALLEL TO CHAIN WHEN CHAIN IS TIGHT.

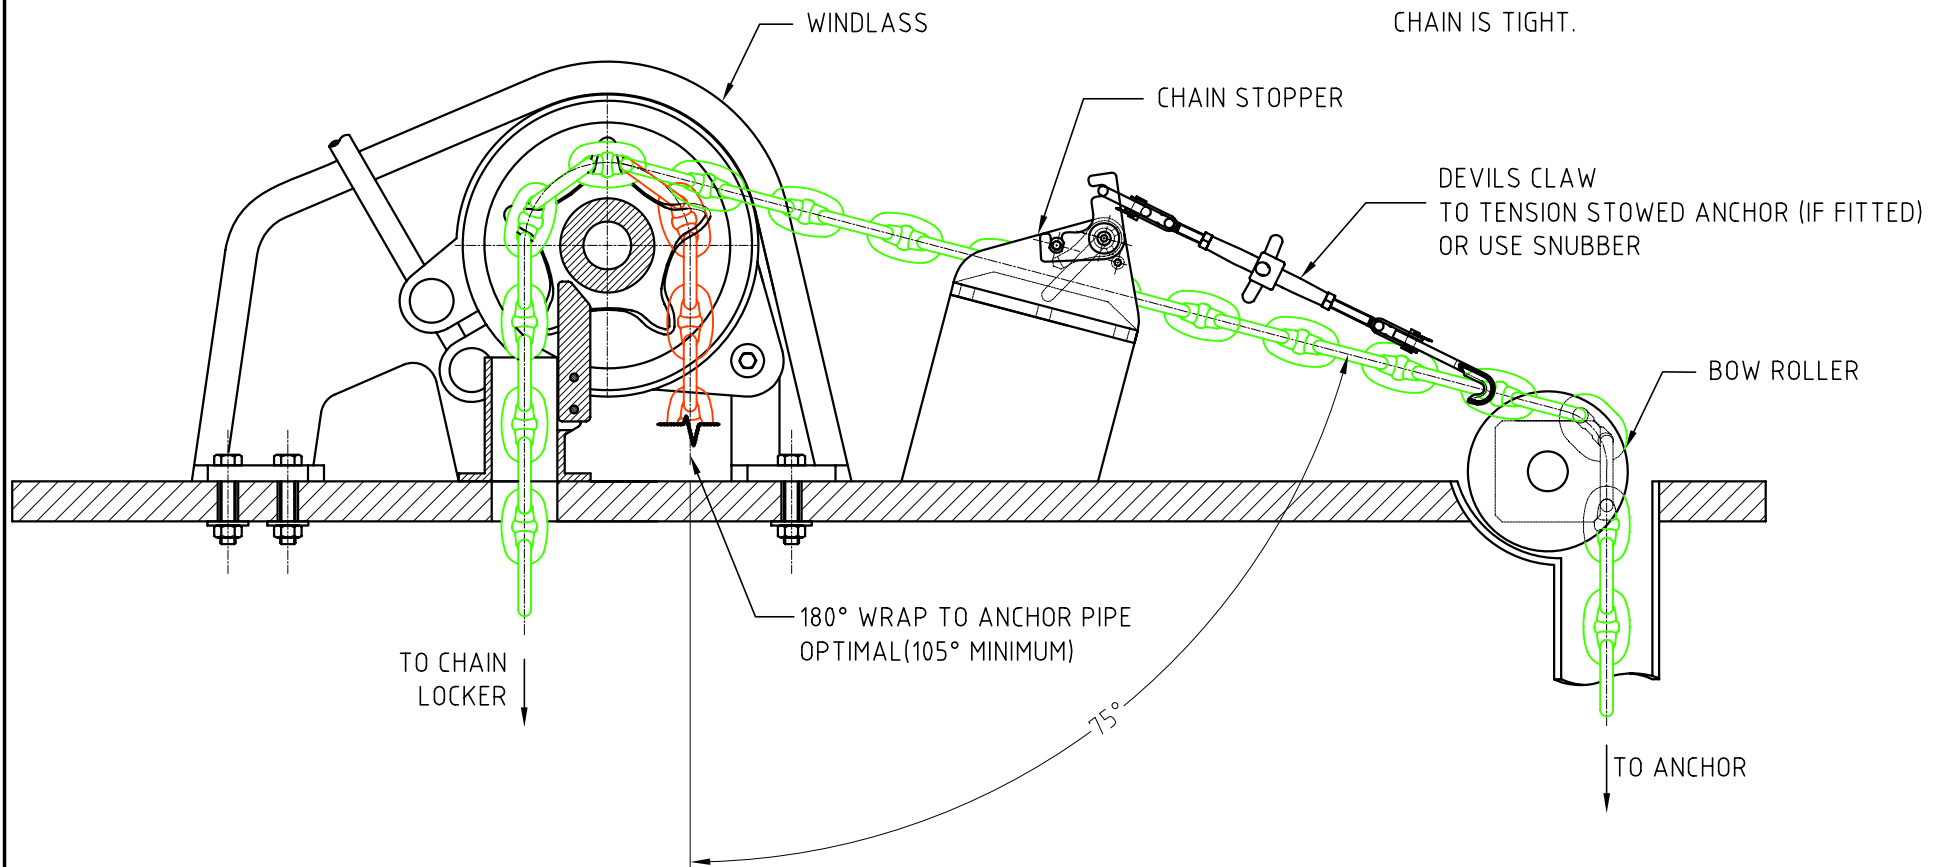


DO NOT SCALE DRAWING



TOLERANCES (mm)	
X.	± 0.5
X.X	± 0.1
X.XX	± 0.025
UNLESS OTHERWISE SPECIFIED	
MATERIAL	
FINISH	

WINDLASSES AUSTRALIA			
TITLE HORIZONTAL WINDLASS AND CHAIN STOPPER GENERAL SETUP DIAGRAM			
PART No. HORIZONTAL SETUP			
DRN JT	DATE 04-06-08	DRG No. HORIZONTAL SETUP	
SCALE NTS	APP1	APP2	SIZE A4
© COPYRIGHT MUIR ENGINEERING PTY. LTD.			


ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F901007	HANDLE ALLOY 280mm BLACK
2	1	G06xxxx	1500W / MVF63 MOTOR GEARBOX COMBINATION
3	1	K061257	SHAFT ASSEMBLY
3.1	1	P081044	CONE *SS316 VERSION* HR 2500 SHAFT CONE
3.2	1	P121019	KEY BRASS 1/4" x 1/4" x 25mm
3.3	1	P121032	KEY BRASS 5/16" x 5/16" x 116mm
3.4	1	P151011	DRIVE PIN SS316 VR/VRC 850/1250A 3/8" x 55mm
3.5	1	P181238	SHAFT *SS316 VERSION HR2500* SINGLE GYPSY SINGLE CAPSTAN
4	1	P021001	BUSH SS303 HR1200C COUNTERWEIGHT PAWL
5	1	P021048	SPACER G'SHAFT HR2500C CAPSTAN *OBSELETE USE P021248*
6	1	P021118	HAT BUSH SUIT VR/VRC850-2200 SS GYPSY (NON-MORS)
7	1	P021246	BEARING GYPSY SIDE *SS316 VERSION HR1600* SGSC
8	1	P021247	BEARING CAPSTAN SIDE *SS316 VERSION* SSGSC
9	1	P021251	BUSH GUARDSHAFT GYPSY SIDE *SS316 VERSION HR2500* SGSC
10	1	P041060	CAPSTAN SS316 HR1200C COUGAR
11	1	P051040	CHAINPIPE SS316 HR2500, HR2500 SS316, HR3500 SS316
12	1	P071006	CLUTCH CAP SS316 VR850
13	1	P10xxxx	GENERIC GYPSY - "REFER TO ONLINE MUIR GYPSY SELECTOR"
14	1	P111001	EXTENSION HANDLE
15	1	P111004	HANDLE LEVER SS316 HR1600-3500
16	1	P131001	PAWL C/WEIGHT HR1200C COUGAR SS316
17	1	P131002	PAWL LEVER HANDLE HR1200C COUGAR SS316 RH
18	1	P211011	END WASHER HR/ DW/DFF10-12-15
19	1	P221547	HOUSING HR2500 CHEETAH CAST SS316
20	1	P221555	BASE PLATE HDPE FOR SS316 HR2500/3500 CHEETAH/JAGUAR
21	1	P231007	D WASHER SS304 2" x 7/8" x 5mm VR1250/1K
22	1	R122826	GEARBOX BOTTOM SPACER FOR 1500W MOTOR HR2500 SS316 HOUSING
23	1	R122827	GEARBOX TOP SPACER FOR 1500W MOTOR HR2500 SS316 HOUSING
24	2	R411010	O-RING SEAL 42 x 35 x 3.5 (BS220)
25	1	S361013	SCREW HEX HD SS304 3/8" x 1"
26	1	S361028	SCREW HEX HD SS316 M10 x 25mm
27	6	S441004	SCREW SHCS CSK SS316 M6 x 10mm
28	1	S451013	SCREW SHCS SS304 5/16" x 1/2"
29	2	S751022	WASHER FLAT SS316 3/8" x 3/4"
30	1	S761014	WASHER SPRING SS316 M10

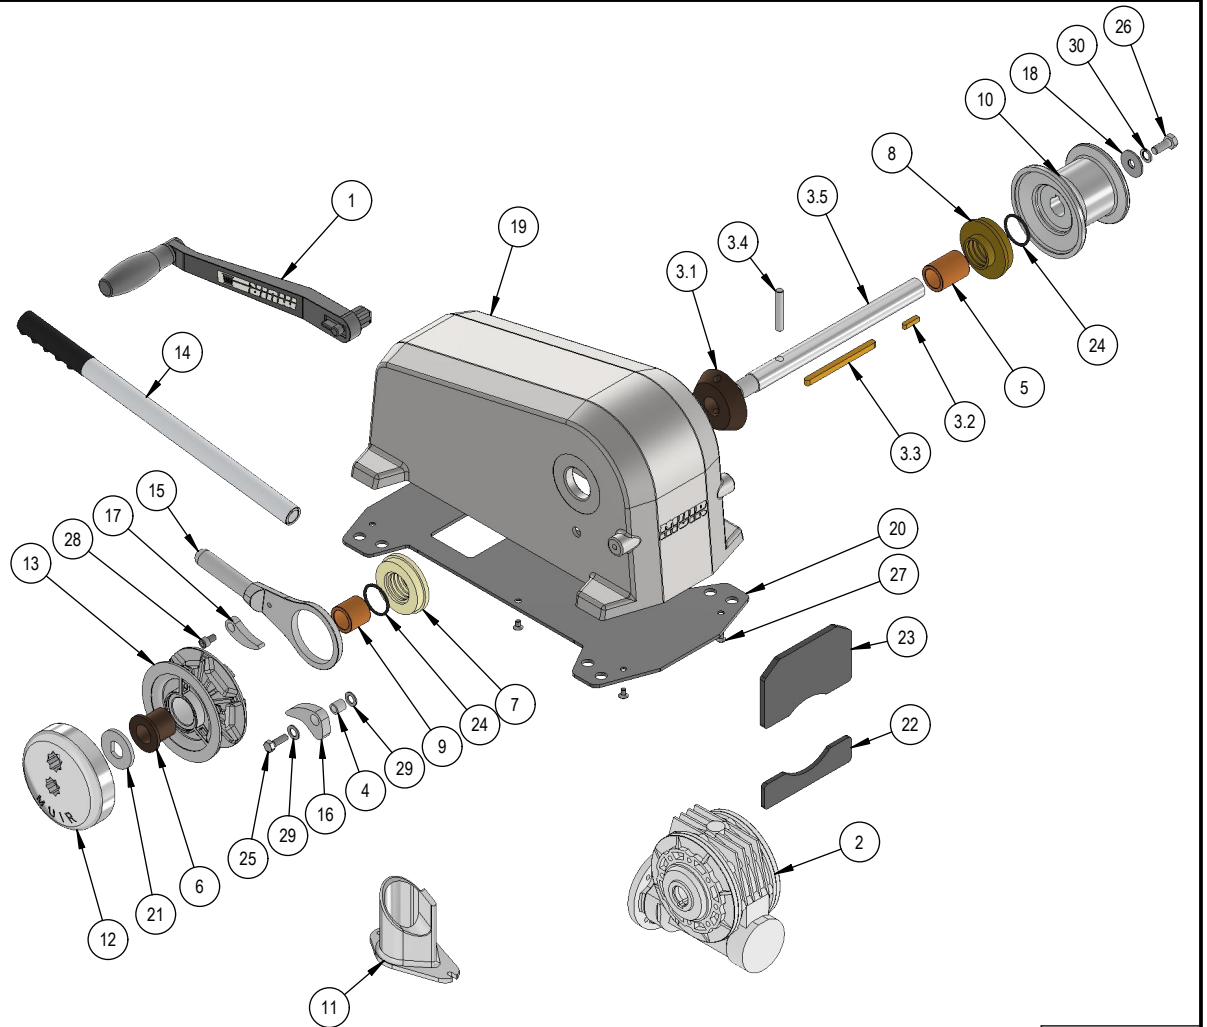

TOLERANCES (mm) X ± 0.5 X.X ± 0.1 X.XX ± 0.03		DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATE.		 ENGINEERING GROUP PTY. LTD. SINCE 1966	
UNLESS OTHERWISE SPECIFIED		DO NOT SCALE DRAWING			
		MANUSOFT NUMBER			
STOCK No.:		APPROVED		UNIVERSAL CHEETAH HORIZONTAL WINDLASS HR2500 SS316	
MATERIAL:		CHECKED			
FINISH:				DRG NO: U001044	
				DRAWING ISSUE: 1	
WEIGHT: N/A		DRAWN BY: MM 4/07/2025		PART NO: U001044	
Unless specifically stated otherwise, this drawing is the property of MUIR Engineering Group, and no feature embodied herein may be disclosed, except as previously authorised, in writing, by MUIR Engineering Group.				SCALE: NTS	SHEET 2 OF 2
					A4

W:\Controlled Drawings\U00 UNIVERSAL GENERIC EQUIPMENT\U00 - RECREATIONAL\4 - COMPACT HORIZONTAL\U001073.idw

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F801114	AUTO ANCHOR SENSOR PACK INCLUDING MAGNETS
2	1	G061022	500W / MVF63 MOTOR GEARBOX COMBINATION
3	1	K061075	SHAFT ASSEMBLY HR3500 JAGUAR SG/SC
3.1	1	P081027	O' CONE BRONZE HR1200C COUGAR
3.2	1	P121020	KEY BRASS 1/4" X 1/4" X 50mm
3.3	1	P121032	KEY BRASS 5/16 X 5/16 X 116mm
3.4	1	P151011	DRIVE PIN SS316 VR/VRC 850/1250A 3/8" x53mm LONG
3.5	1	P181033	SHAFT HR3500 JAGUAR SG/SC DIA 1 3/8 x 416mm
4	1	P021004	BUSH SS303 HR3500C/HR4000 C/WEIGHT PAWL
5	1	P021034	CAPSTAN SPACER HR3500C
6	1	P021050	SPACER GUARDSHAFT HR3500C CAPSTAN - CUT TO SUIT ASSEMBLY
7	1	P021073	BEARING CAPSTAN SIDE NOV HR1200C COUGAR51 X 35 X 31
8	1	P021075	BEARING LEVER HANDLE NOV HR1200C COUGAR 76 X 35 X 27
9	4	P021080	BUSH NYLON HR1200C COUGAR FOOT BLACK COLOUR PA 6
10	1	P021093	BASE PLATE DC MOTOR SPACER
11	1	P041018	CAPSTAN SS 316 VC850/JAGUAR
12	1	P051042	CHAIN PIPE - SS316
13	1	P071003	CLUTCH NUT SS316 HR1200-3500 COUGAR 3 PRONG
14	1	P081001	D' CONE SS316 HR1200C COUGAR
15	1	P10xxxx	GENERIC GYPSY - "REFER TO ONLINE MUIR GYPSY SELECTOR"
16	1	P111001	EXTENSION HANDLE
17	1	P111004	HANDLE LEVER SS316 HR1600-3500
18	1	P131002	PAWL LEVER HANDLE HR1200C COUGAR SS316
19	1	P131007	PAWL COUNTERWEIGHT HR3500/4000C # NOW SS316 #
20	1	P221077	HOUSING ALLOY HR3500 JAGUAR SG/SC
21	1	P221443	BASE PLATE HDPE
22	2	R411010	O' RING SEAL 42 X 35 X 3.5 (BS220)
23	6	S331002	SCREW CSK PH MT SS316 3/16" X 1/2"
24	1	S331019	SCREW CSK SL MT SS304 3/8" X 1-1/4"
25	1	S331010	SCREW CSK SL MT SS304 1/4" X 1"
26	1	S361013	SCREW HEX HD SS304 3/8" X 1"
27	1	S361022	SCREW HEX HD SS304 1/2" - UNC X 2"
28	1	S451013	SCREW SHCS SS304 5/16" X 1/2"
29	3	S751026	WASHER FLAT SS316 1/2" X 1-1/4"
30	1	S761006	WASHER SPRING SS316 3/8"

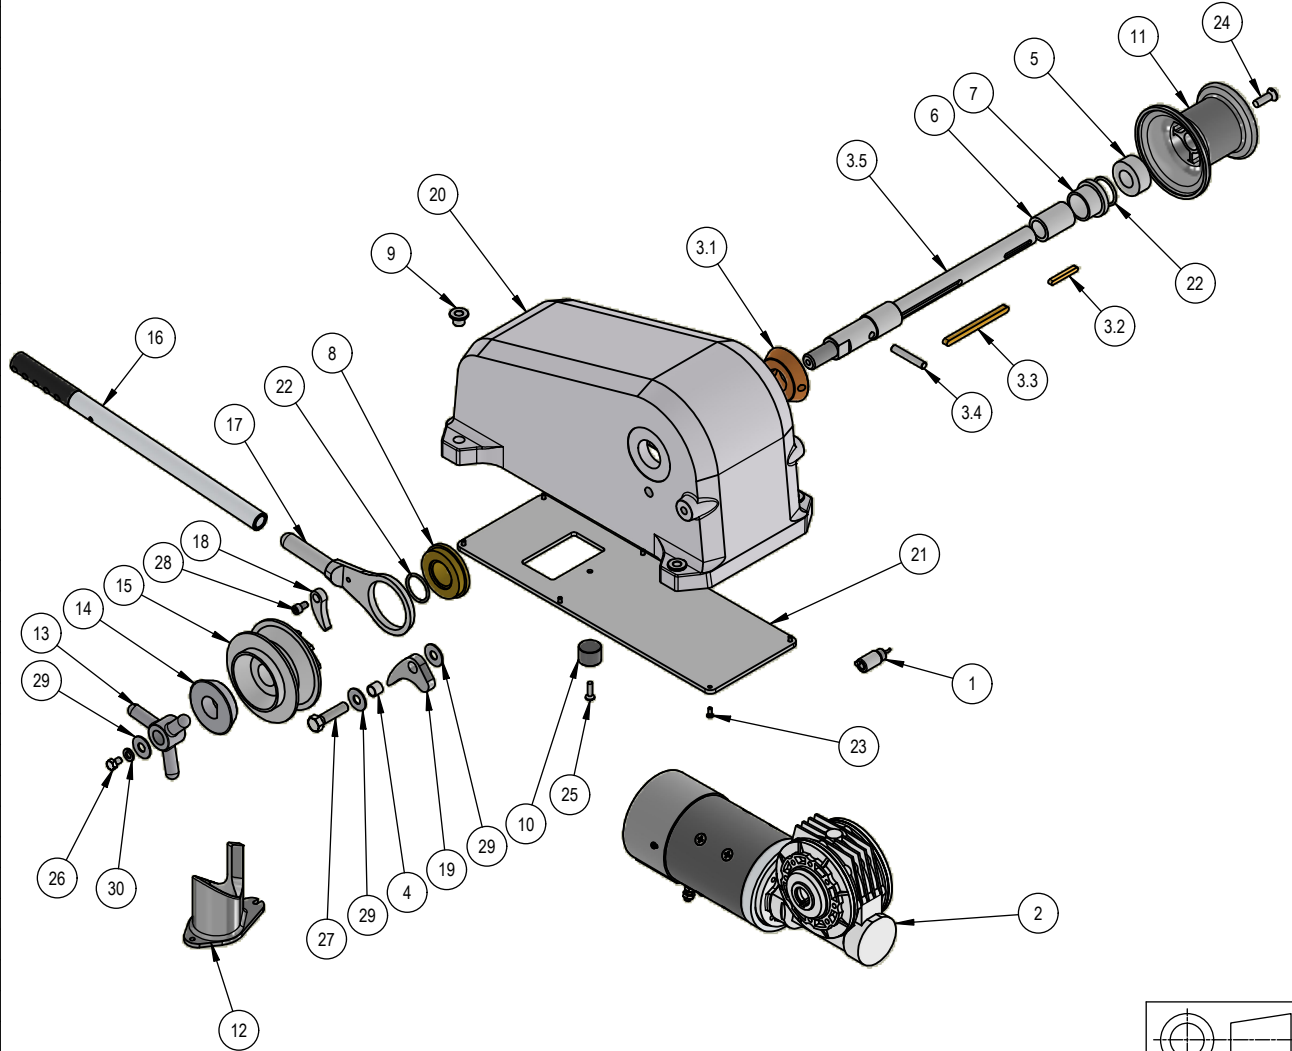


TOLERANCES (mm) X ±0.5 X.X ±0.1 X.XX ±0.03 UNLESS OTHERWISE SPECIFIED	DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATE.		SINCE 1968 ENGINEERING GROUP PTY. LTD.	
	DO NOT SCALE DRAWING			
	MANUSOFT NUMBER		UNIVERSAL JAGUAR HORIZONTAL WINDLASS HR3500 ALLOY	
	APPROVED			
STOCK No.:	CHECKED			
MATERIAL:			PART NO: U001073	
FINISH:				
WEIGHT: N/A	DRAWN BY: MM	4/07/2025	SCALE: NTS	
Unless specifically stated otherwise, this drawing is the property of MUIR Engineering Group, and no feature embodied herein may be disclosed, except as previously authorised, in writing, by MUIR Engineering Group.			SHEET 1	OF 1
			A4	

1		INITIAL RELEASE	4/07/2025	MM
REV #	ECR#	DESCRIPTION	DATE	DRAWN
REVISION HISTORY				

NOTES

This image shows a full page of white paper with horizontal dotted lines, typical of primary school writing paper. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

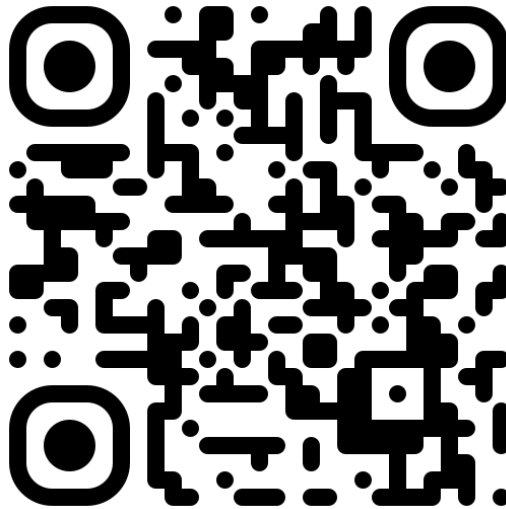

SCAN THE QR CODE FOR MORE INFORMATION

muir.com.au/hub/

Head Office:

100 Browns Road
Kingston, Tasmania
Australia, 7050
Int Tel: +61 03 62290600
Email: info@muir.com.au
www.muir.com.au

Windlass: _____

Serial Number: _____

© 2025 Muir Engineering Group Pty Ltd.

All rights reserved. Muir Engineering Group Pty Ltd reserves the right to alter specifications without notice. While every effort has been made to ensure the accuracy of this manual, the company accepts no responsibility for any errors or omissions.